

UNCLASSIFIED

Defense Technical Information Center
Compilation Part Notice

ADP022566

TITLE: Bandwidth Extension of an S-band, Fundamental-Mode
Eight-Beam Klystron

DISTRIBUTION: Approved for public release, distribution unlimited

This paper is part of the following report:

TITLE: 2006 IEEE International Vacuum Electronics Conference held
jointly with 2006 IEEE International Vacuum Electron Sources Held in
Monterey, California on April 25-27, 2006

To order the complete compilation report, use: ADA453924

The component part is provided here to allow users access to individually authored sections
of proceedings, annals, symposia, etc. However, the component should be considered within
the context of the overall compilation report and not as a stand-alone technical report.

The following component part numbers comprise the compilation report:
ADP022420 thru ADP022696

UNCLASSIFIED

Bandwidth Extension of an S-band, Fundamental-Mode Eight-Beam Klystron

Khanh T. Nguyen

Beam-Wave Research, Inc.
Bethesda, MD 20814

Dean E. Pershing

ATK Mission Research
Newington, VA 22122

David K. Abe and Baruch Levush

U.S. Naval Research Laboratory, Code 6840
Washington, DC 20375

Abstract: We present the design of a five-cavity, broadband, high-power multiple-beam klystron (MBK) operating in S-band. The MBK uses a 32 A, 45 kV eight-beam electron gun [1] whose design has been successfully tested in a previous narrowband MBK circuit [2, 3]. The circuit was optimized using the 3D particle-in-cell code MAGIC; the predicted performance includes a 3-dB bandwidth of 6.7%, peak power of ~600 kW and a gain of 33 dB. This circuit performance represents a three-fold increase in the bandwidth-power product relative to our previous circuit.

Keywords: Multiple-beam klystron; MBK; bandwidth extension; broadband cavity.

Design of a Broadband Multiple-Beam Circuit

To achieve broad bandwidth operation, the circuit employs three two-gap cavities (the input cavity, second cavity, and output cavity) and two single-gap cavities (third cavity and pen-ultimate cavity). The purpose of the two-gap cavities is to increase the R/Q to enable broader bandwidth operation while maintaining the desired saturated power and gain within the constraints of a short overall interaction length. In the two-gap cavities, four rectangular slots couple two separate but dimensionally-identical cavities via their common endwalls. As expected for a system of two coupled individual cavities, there are two eigenmodes with distinct frequencies: the $m = 0$ (2π -mode) and the $m = 1$ (π -mode). The coupling slot dimensions control the mode frequency separation and also the coupling strength between the two gaps. For stability reasons and because of geometric constraints, the π -mode was selected as the operating mode for all of the two-gap cavities.

The first four cavities comprise the bunching circuit (Fig. 1a) which produces a highly bunched beam over the frequency band of interest at the axial location of the output cavity with reasonable gain. The evolution of the bunching currents for several frequencies as a function of axial position at 300 W of input power is shown in Fig. 1b. The magnitudes of these currents peak at an axial location

approximately 18 cm downstream from the center of the first gap – the logical position to place the output cavity. In Fig. 2, the bunching current at this axial location is plotted as a function of frequency for different input drive power levels. Note that the beam modulation is relatively flat with frequency and linear with input power.


The predicted MBK output power as a function of frequency is shown in Fig. 3 (using a broadband, two-gap output cavity and a constant 300 W RF input drive). As seen in the figure, the circuit generates >550 kW across the band with a peak power of more than 600 kW at ~3.27 GHz. The 1-dB bandwidth is 5.2% (3-dB bandwidth of 6.7%) with a maximum gain of 33 dB and corresponding efficiency of 42%. This performance has been achieved with an overall circuit length of ~22 cm. Table I summarizes the operating characteristics of the five individual cavities (the 2π -mode frequencies of the three two-gap cavities have been tuned well outside the operating band).

Acknowledgement


This work was supported by the Office of Naval Research.

References

1. K. T. Nguyen, *et al.*, *IEEE Trans. Plasma Sci.*, **32**(3), pp. 1212-1222, June 2004.
2. K. T. Nguyen, *et al.*, *IEEE Trans. Plasma Sci.*, **32**(3), pp. 1119-1135, June 2004.
3. D. K. Abe, *et al.*, *IEEE Electron Dev. Lett.*, **26**(8), pp. 590-592, Aug. 2005.
4. K. T. Nguyen, *et al.*, *IEEE Trans. Plasma Sci.*, **33**(2), pp. 685-695, Apr. 2005.

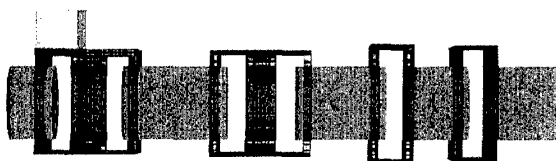

(a)

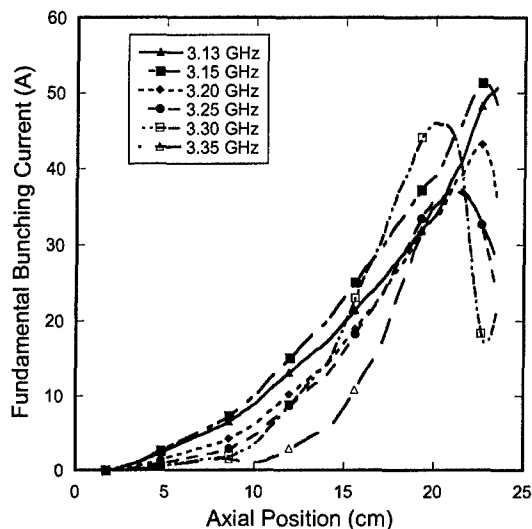

(b)

Figure 1. (a) MAGIC-3D solid model of the bunching circuit; (b) the computed fundamental bunching current as a function of axial position for a variety of driving frequencies (constant 300 W RF input drive).

Table 1: Individual characteristics of the five cavities comprising the broadband MBK circuit.

Cavity	# of Gaps	f_0 (GHz)	Q
Input	2 (π -mode)	3.160	54
Idler 1	2 (π -mode)	3.328	65
Idler 2	1	3.384	63
Idler 3	1	3.456	--
Output	2 (π -mode)	3.213	19

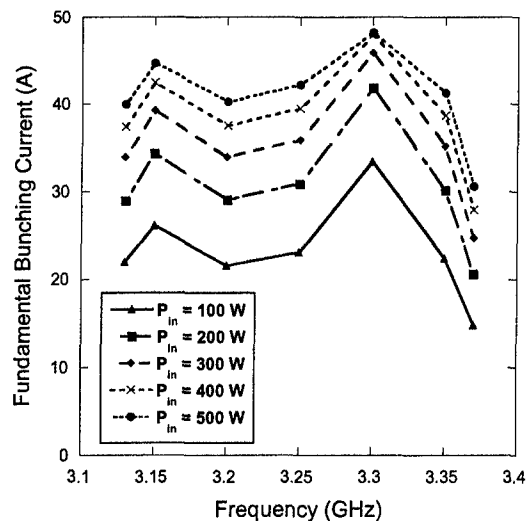


FIGURE 2. Computed (MAGIC-3D) fundamental bunching current as function of frequency at an axial location of ~ 18 cm downstream from the center of the first gap for a variety of input drive power levels.

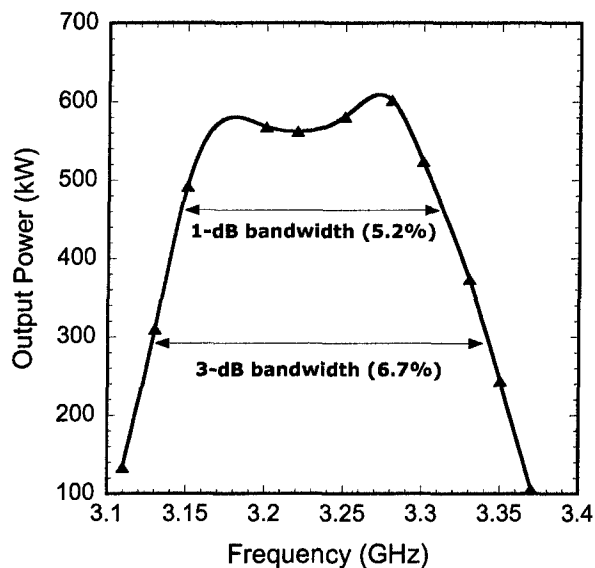


FIGURE 3. Computed (MAGIC-3D) frequency response of the eight-beam, five-cavity MBK circuit for a constant drive power of 300 W.